




- HSC/HHC-Kopierbearbeitung
- Gehärtete Stähle bis 65 HRC
- Ausführung mit Eckenradius
- Glatter Schaft DIN 6535 HA
- Oberfläche X.Cut beschichtet
- HSC/HHC copy milling operations
- Hardened steels up to 65 HRC
- Short series with corner radius
- Straight shank DIN 6535 HA
- With X.Cut coating

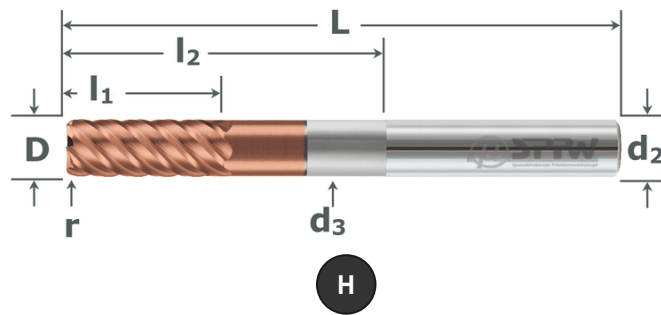

VHM	X Cut
HSC-H 40°	z: 4-6
DIN 6535HA	ER Torus

### 756424 - kurz | short series

ØD h10	Ød2 h6	L	l1	l2	z	r +0,015	Ød3	Art. No.	Stk/pce Euro	ØD h10	Ød2 h6	L	l1	l2	z	r +0,015	Ød3	Art. No.	Stk/pce Euro
2	6	57	3	7	4	0,2	1,9	7564240202	58,60	5	6	57	6	16	4	1	4,6	7564240510	59,70
2	6	57	3	7	4	0,4	1,9	7564240204	58,60	6	6	57	7	19	6	0,5	5,5	7564240605	50,50
3	6	57	4	10	4	0,3	2,8	7564240303	58,60	6	6	57	7	19	6	1	5,5	7564240610	50,50
3	6	57	4	10	4	0,6	2,8	7564240306	58,60	8	8	63	9	25	6	0,5	7,4	7564240805	64,30
4	6	57	5	13	4	0,4	3,7	7564240404	59,50	8	8	63	9	25	6	1	7,4	7564240810	64,30
4	6	57	5	13	4	0,8	3,7	7564240408	59,50	10	10	72	11	31	6	1	9,2	7564241010	86,90
5	6	57	6	16	4	0,5	4,6	7564240505	59,70	12	12	83	13	37	6	1	11	7564241210	113,40