


114 700

Kegel-Handreibahlen HSS Steigung 2% (1:50) HSS Taper Pin Hand Reamers 2% (1:50)



- Konisch 2% (1:50)
- Reiben konischer Bohrungen
- Linksspirale, rechtsschneidend
- Stiftloch-Handreibahle
- Oberfläche blank
- Tapered 2% (1:50)
- Reaming tapered holes
- LH-helix, right hand cutting
- Taper pin hand reamer
- Bright finish

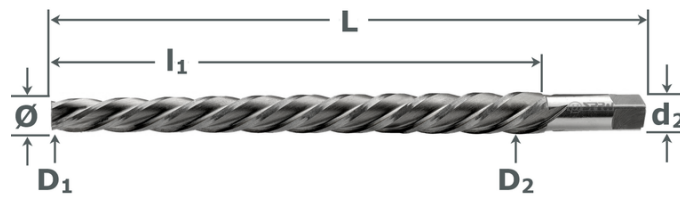

HSS E05	blank
DIN 9	Form A
Hand	1:50 2%

Ø nominal	ØD1	ØD2	Ød2 h9	L	l1	z	Art. No.	Stk/pce Euro
0,8	0,7	1,2	1,2	42	24	2	1147000080	43,20
1	0,9	1,4	1,5	46	28	2	1147000100	36,00
1,2	1,1	1,7	1,8	50	32	2	1147000120	34,50
1,5	1,4	2,1	2,2	57	37	3	1147000150	31,50
2	1,9	2,8	3,1	72	48	3	1147000200	29,20
2,5	2,4	3,3	3,3	72	48	3	1147000250	28,70
3	2,9	4	4	80	58	3	1147000300	27,70
4	3,9	5,2	5	93	68	3	1147000400	27,70
5	4,9	6,3	6,3	100	73	3	1147000500	30,30

Ø nominal	ØD1	ØD2	Ød2 h9	L	l1	z	Art. No.	Stk/pce Euro
6	5,9	8	8	135	105	3	1147000600	37,20
8	7,9	10,8	10	180	145	3	1147000800	50,00
10	9,9	13,4	12,5	215	175	4	1147001000	67,70
12	11,8	16	14	255	210	4	1147001200	98,60
16	15,8	20,4	18	280	230	4	1147001600	148,20
20	19,8	24,8	22,4	310	250	4	1147002000	210,90
25	24,7	30,7	28	370	300	6	1147002500	323,80
30	29,7	36,1	36,1	400	320	6	1147003000	599,90

E