


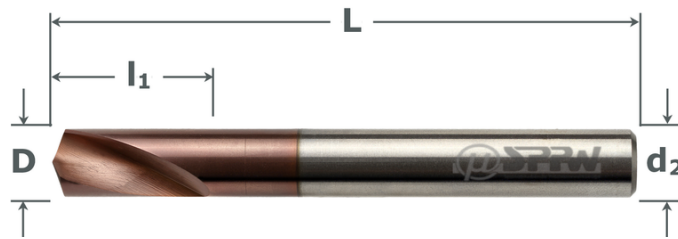
**123 604**

## NC-Anbohrer HSS-E05+X.Cut 142° HSS-E05 NC Spotting Drills+X.Cut 142°




- Formgenauer Präzisionsanschliff
- Optimiertes Eindringverhalten
- Glatter Zylinderschaft mit Toleranz h6
- Senkwinkel 142°
- Oberfläche X5.Cut

- High precision point geometry
- Easy penetration and high accuracy
- Straight shank in tolerance h6
- Point angle 142°
- With X5.Cut coating

**B**

ØD h7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
3	3	50	10	1236040300	10,95
4	4	52	12	1236040400	9,00
5	5	60	15	1236040500	9,35
6	6	66	20	1236040600	10,30
8	8	79	25	1236040800	12,50

ØD h7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
10	10	89	25	1236041000	15,40
12	12	102	30	1236041200	20,60
16	16	115	35	1236041600	33,30
20	20	131	40	1236042000	49,10

**— INFO****— INFO**

Senkwinkel 142° zum Anbohren bei Hochleistungsbohrern aus VHM mit 140° Spitzenwinkel.

142° spotting angle allows pilot drilling for carbide high performance drills 140° point angle.