


572 340

Bohrnutenfräser HSS-E08+X.Cut - Toleranz e8 HSS-E08 End Mills+X.Cut - Tolerance e8



- Allgemeine Anwendung
- Zentrumschnitt, Toleranz e8
- Nut / Taschenfräsen, Passfedernuten
- Extra kurze, stabile Ausführung
- Schaft DIN 1835 B mit Spannfläche
- Oberfläche X.Cut beschichtet

- General purpose milling cutter
- Center cutting, tolerance e8
- Keyway milling, slotting, pocketing
- Stub series and rigid version
- Flatted shank DIN 1835 B
- With X.Cut coating

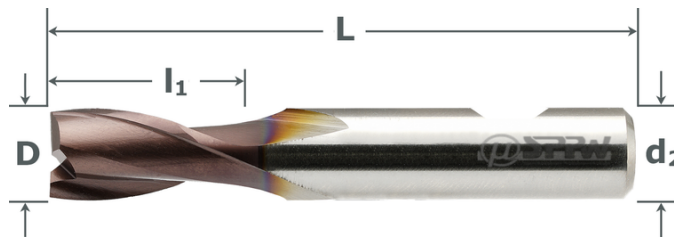

HSS E08	X Cut
DIN 327	Typ N
ToL e8	z:2
DIN 1835B	

572340 - DIN 327 extra-kurz | stub length

ØD e8	Ød2 h6	L	l1	z	Art. No.	Stk/pce Euro	ØD e8	Ød2 h6	L	l1	z	Art. No.	Stk/pce Euro
2	6	48	4	2	5723400200	10,80	11	12	70	13	2	5723401100	19,20
2,5	6	49	5	2	5723400250	11,20	11,5	12	70	13	2	5723401150	21,40
3	6	49	5	2	5723400300	9,75	12	12	73	16	2	5723401200	18,30
3,5	6	50	6	2	5723400350	10,90	13	12	73	16	2	5723401300	30,70
4	6	51	7	2	5723400400	10,10	14	12	73	16	2	5723401400	28,20
4,5	6	51	7	2	5723400450	10,90	15	12	73	16	2	5723401500	31,80
5	6	52	8	2	5723400500	10,10	16	16	79	19	2	5723401600	30,40
5,5	6	52	8	2	5723400550	11,60	17	16	79	19	2	5723401700	45,60
6	6	52	8	2	5723400600	10,90	18	16	79	19	2	5723401800	40,40
6,5	10	54	10	2	5723400650	15,70	19	16	79	19	2	5723401900	53,80
7	10	60	10	2	5723400700	14,40	20	20	88	22	2	5723402000	44,00
7,5	10	60	10	2	5723400750	15,70	22	20	88	22	2	5723402200	74,80
8	10	60	11	2	5723400800	14,70	24	25	102	26	2	5723402400	71,10
8,5	10	61	11	2	5723400850	19,10	25	25	102	26	2	5723402500	70,20
9	10	61	11	2	5723400900	16,60	26	25	102	26	2	5723402600	104,90
9,5	10	61	11	2	5723400950	19,10	28	25	102	26	2	5723402800	106,70
10	10	63	13	2	5723401000	16,20	30	25	102	26	2	5723403000	101,20
10,5	12	70	13	2	5723401050	21,40	32	32	112	32	2	5723403200	100,30

K