


573 440

Bohrnutenfräser HSS-E08+X.Cut Kurz 3 Schneiden HSS-E08 End Mills+X.Cut Short Series 3 Flutes



- Allgemeine Anwendung
- Toleranz e8, Passfedernuten
- 3 Schneiden, 50% mehr Spanleistung
- Schaft DIN 1835 B mit Spannfläche
- Oberfläche X.Cut beschichtet
- General purpose milling cutter
- tolerance e8 for keyway milling
- 3 flutes - 50% high chip removal rate
- Flatted shank DIN 1835 B
- With X.Cut coating

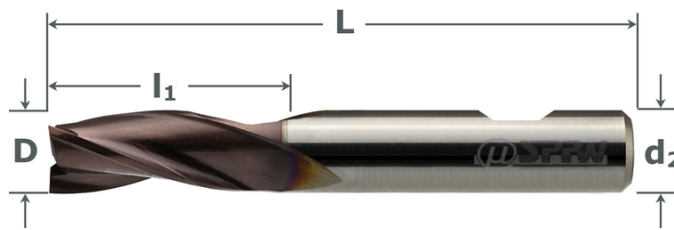

HSS E08	X Cut
DIN 844K	Typ N
z:3	DIN 1835B

ØD e8	Ød2 h6	L	l1	z	Art. No.	Stk/pce Euro	ØD e8	Ød2 h6	L	l1	z	Art. No.	Stk/pce Euro
3	6	52	8	3	5734400300	11,10	11	12	79	22	3	5734401100	25,50
4	6	55	11	3	5734400400	11,50	12	12	83	26	3	5734401200	21,00
5	6	57	13	3	5734400500	11,50	13	12	83	26	3	5734401300	39,40
6	6	57	13	3	5734400600	11,90	14	12	83	26	3	5734401400	32,20
7	10	66	16	3	5734400700	17,90	15	12	83	26	3	5734401500	43,00
8	10	69	19	3	5734400800	15,50	16	16	92	32	3	5734401600	34,70
9	10	69	19	3	5734400900	19,40	18	16	92	32	3	5734401800	46,50
10	10	72	22	3	5734401000	18,10	20	20	104	38	3	5734402000	52,00

K