


574 440**Schaftfräser HSS-E08+X.Cut
HSS-E08 End Mills+X.Cut**

- Allgemeine Anwendung
- Zentrumschnitt zum Tauchen
- Umfangs- und Stirnfräsen
- Schaft DIN 1835 B mit Spannfläche
- Oberfläche X.Cut beschichtet

- General purpose milling cutter
- Center cutting for plunging
- Front and peripheral milling
- Flatted shank DIN 1835 B
- With X.Cut coating

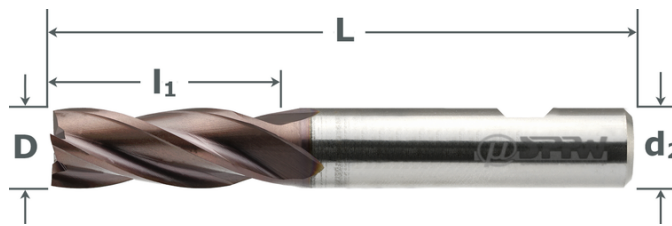

HSS E08	X Cut
DIN 844K	Typ N
z: 3-6	DIN 1835B

ØD k10	Ød2 h6	L	l1	z	Art. No.	Stk/pce Euro	ØD k10	Ød2 h6	L	l1	z	Art. No.	Stk/pce Euro
2	6	51	7	3	5744400200	11,00	11	12	79	22	4	5744401100	19,70
2,5	6	52	8	3	5744400250	11,60	12	12	83	26	4	5744401200	18,60
3	6	52	8	4	5744400300	10,10	13	12	83	26	4	5744401300	31,60
3,5	6	54	10	4	5744400350	11,20	14	12	83	26	4	5744401400	29,10
4	6	55	11	4	5744400400	10,50	15	12	83	26	4	5744401500	33,00
4,5	6	55	11	4	5744400450	11,20	16	16	92	32	4	5744401600	31,30
5	6	57	13	4	5744400500	10,50	17	16	92	32	4	5744401700	44,50
5,5	6	57	13	4	5744400550	11,90	18	16	92	32	4	5744401800	39,30
6	6	57	13	4	5744400600	11,20	19	16	92	32	4	5744401900	49,59
6,5	10	66	16	4	5744400650	16,20	20	20	104	38	4	5744402000	42,60
7	10	66	16	4	5744400700	14,80	22	20	104	38	5	5744402200	73,00
7,5	10	66	16	4	5744400750	16,20	24	25	121	45	5	5744402400	70,20
8	10	69	19	4	5744400800	14,10	25	25	121	45	5	5744402500	68,40
8,5	10	69	19	4	5744400850	19,00	26	25	121	45	5	5744402600	101,20
9	10	69	19	4	5744400900	17,30	28	25	121	45	5	5744402800	103,10
9,5	10	69	19	4	5744400950	19,00	30	25	121	45	5	5744403000	97,60
10	10	72	22	4	5744401000	16,80	32	32	133	53	5	5744403200	96,70

K