




- Für G Innen- und Außengewinde
- ThreadBurr
- Gewinden / Entgraten in einem Zug
- Oberfläche X6.Cut beschichtet
- For internal and external G threads
- ThreadBurr
- Threading, deburring in 1 operation
- With X6.Cut coating

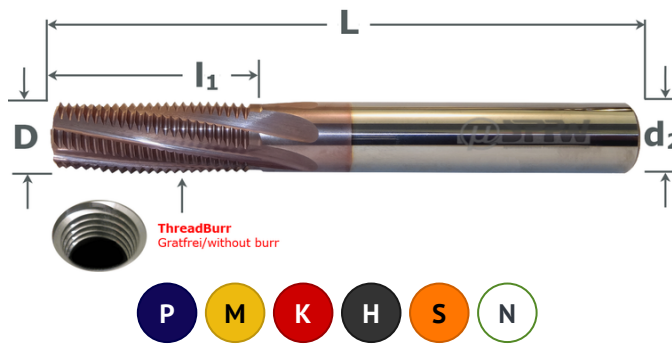

VHM	X Cut
INT EXT	DIN 6535HA
Thread Burr	G

Stg. TPI	ØD	Ød2	L	l1	z	G	Art. No.	Stk/pce Euro	Stg. TPI	ØD	Ød2	L	l1	z	G	Art. No.	Stk/pce Euro
28	6	6	63	10,43	3	1/16-1/8	XB0606C1028W	133,60	14	12	12	83	28,12	4	1/2-7/8	XB1212D2814W	277,70
28	8	8	63	14,06	4	1/8	XB0808D1428W	185,90	14	16	16	89	28,12	5	1/2-7/8	XB1616E2814W	363,20
19	8	8	63	15,37	3	1/4-3/8	XB0808C1519W	169,00	11	12	12	83	26,55	3	1'-1'1/2	XB1212C2611W	252,40
19	10	10	76	22,06	4	1/4-3/8	XB1010D2219W	215,00	11	16	16	100	40,41	4	1'-3'	XB1616D4011W	363,20
14	12	12	83	20,86	4	1/2-7/8	XB1212D2014W	252,40	11	20	20	120	49,65	5	1'-3'	XB2020E4911W	464,40

