




- Für metrische ISO-Innengewinde
- Gewinde und Fasen in einem Zug
- Herstellen von 45° Fasen
- Oberfläche X6.Cut beschichtet
- For internal metric ISO-threads
- Simultaneous threading, chamfering
- Production of 45° chamfers
- With X6.Cut coating

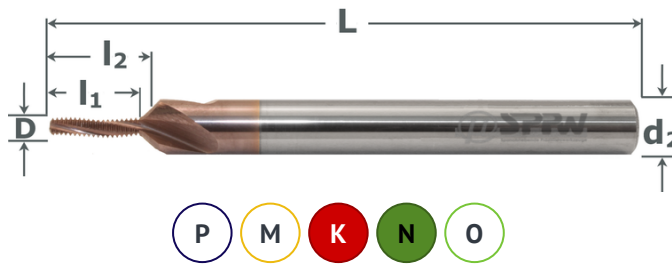

VHM	X Cut
INT	z:3
DIN 6535HA	M

Stg.	ØD	L	l1	l2	Ød2	M	nxØ	Art. No.	Stk/pce	Euro
0,5	2,3	63	5,25	5,85	6	M3	1,5	NF06023C505ISO	136,50	
0,5	2,3	63	6,75	7,35	6	M3	2	NF06023C605ISO	150,20	
0,5	2,3	63	8,25	8,85	6	M3	2,5	NF06023C805ISO	165,10	
0,5	2,3	63	9,75	10,35	6	M3	3	NF06023C905ISO	177,80	
0,7	3	63	7,35	8,2	6	M4	1,5	NF0603C707ISO	136,50	
0,7	3	63	8,75	9,6	6	M4	2	NF0603C807ISO	150,20	
0,7	3	63	10,85	11,7	6	M4	2,5	NF0603C1007ISO	165,10	
0,7	3	63	12,95	13,8	6	M4	3	NF0603C1207ISO	181,70	
0,8	3,8	63	8,4	9,4	6	M5	1,5	NF06038C808ISO	136,50	
0,8	3,8	63	10,8	11,8	6	M5	2	NF06038C1008ISO	147,00	
0,8	3,8	63	13,2	14,2	6	M5	2,5	NF06038C1308ISO	161,60	
0,8	3,8	63	16,4	17,4	6	M5	3	NF06038C1608ISO	173,80	

Stg.	ØD	L	l1	l2	Ød2	M	nxØ	Art. No.	Stk/pce	Euro
1	4,5	63	10,5	11,75	8	M6	1,5	NF08045C1010ISO	154,20	
1	4,5	63	13,5	14,75	8	M6	2	NF08045C1310ISO	169,80	
1	4,5	63	16,5	17,75	8	M6	2,5	NF08045C1610ISO	186,70	
1,25	6	76	14,37	16	10	M8	1,5	NF1006C14125ISO	178,60	
1,25	6	76	18,12	19,75	10	M8	2	NF1006C18125ISO	196,40	
1,25	6	76	21,87	23,5	10	M8	2,5	NF1006C21125ISO	216,20	
1,5	7,5	83	17,25	19,25	12	M10	1,5	NF12075C1715ISO	197,30	
1,5	7,5	83	21,75	23,75	12	M10	2	NF12075C2115ISO	217,30	
1,5	7,5	83	27,75	29,75	12	M10	2,5	NF12075C2715ISO	238,80	
1,75	9	89	20,12	22,5	14	M12	1,5	NF1409C20175ISO	235,30	
1,75	9	89	27,12	29,5	14	M12	2	NF1409C27175ISO	258,90	
1,75	9	89	32,37	34,75	14	M12	2,5	NF1409C32175ISO	284,50	

