




- Für gerade Innengewinde - NPSF
- Gewinden, Entgraten in einem Zug
- Oberfläche X6.Cut beschichtet
- Der Flankenwinkel beträgt 60°
- For internal, external threads
- Threading, deburring in 1 operation
- With X6.Cut coating

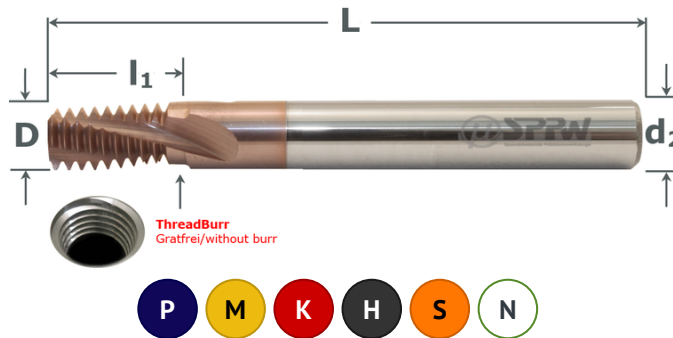

VHM	X Cut
INT EXT	z: 3-4
DIN 6535HA	Thread Burr
NPSF	

Stg. TPI	ØD	Ød2	L	l1	z	NPSF	Art. No.	Stk/pce Euro
27	6	6	63	12,7	3	1/16-1/8	XB0606C1227NPSF	147,00
18	8	8	63	16,23	3	1/4-3/8	XB0808C1618NPSF	185,90

Stg. TPI	ØD	Ød2	L	l1	z	NPSF	Art. No.	Stk/pce Euro
14	12	12	83	22,68	4	1/2-3/4	XB1212D2214NPSF	277,70
11,5	16	16	89	29,82	4	1'	XB1616D29115NPSF	399,20

