




- Für PG Innen- und Außengewinde
- Gewinden und Entgraten in einem Zug
- Oberfläche X6.Cut beschichtet
- For internal and external PG threads
- Threading, deburring in 1 operation
- With X6.Cut coating

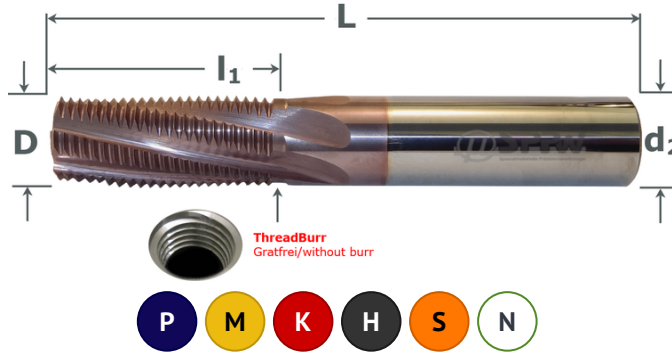

VHM	X Cut
INT EXT	z: 3-4
DIN 6535HA	Thread Burr
PG 80°	

Stg. TPI	ØD	Ød2	L	l1	z	PG	Art. No.	Stk/pce Euro
20	8	8	63	27,52	3	7	XB0808C2120PG	185,90
18	10	10	76	27,52	3	9-16	XB1010C2718PG	236,40

Stg. TPI	ØD	Ød2	L	l1	z	PG	Art. No.	Stk/pce Euro
16	12	12	83	30,96	4	21-48	XB1212D3116PG	277,70

