




- Mit 55° Teilprofil für G/BSP-Gewinde
- Maximaler Freiheitsgrad
- CNC-Steuerung wird benötigt
- Oberfläche X.Cut beschichtet
- 55° partial profile for BS threads
- Maximum freedom for all 55° threads
- CNC control is required
- With X.Cut coating

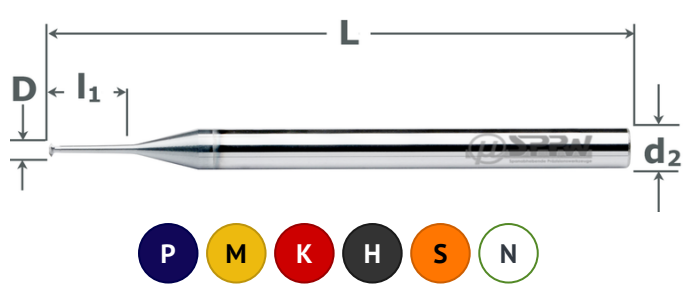

VHM	X Cut
z:3	DIN 6535HA
Micro	BS 55°

G	ØD*	Ød2 h5	L	l1	Ød1*	C	z	Art. No.	Stk/pce Euro
1/8	2,3	6	66	9,52	1,4	0,035	3	SM06230C09G18	79,69
1/8	2,3	6	66	9,52	1,4	0,035	3	SM06230C09G18X	84,20
5/32	3,1	6	66	11,11	1,75	0,035	3	SM06310C11G532	82,29
5/32	3,1	6	66	11,11	1,75	0,035	3	SM06310C11G532X	86,60
3/16	3,65	6	66	19,05	1,8	0,04	3	SM06365C19G316	84,69
3/16	3,65	6	66	19,05	1,8	0,04	3	SM06365C19G316X	89,10
1/4	4,85	6	75	22,22	2,7	0,06	3	SM06485C22G14	99,69
1/4	4,85	6	75	22,22	2,7	0,06	3	SM06485C22G14X	106,40
5/16	6,25	8	80	25,4	3,8	0,08	3	SM08625C25G516	114,59
5/16	6,25	8	80	25,4	3,8	0,08	3	SM08625C25G516X	121,30
3/8	7,5	8	80	25,4	4,8	0,08	3	SM08750C25G38	144,49
3/8	7,5	8	80	25,4	4,8	0,08	3	SM08750C25G38X	153,50

