


731 170 HC

Bohrreibahlen VHM+Dia.HC für Faserwerkstoffe 3 Schneiden Carbide Drill Reamers+Dia.HC for FRP 3 Flutes



- Delaminierungsfreies Bohren von CFK
- Spezielle Geometrie
- Empfohlene Einsatztiefe $2 \times \varnothing$
- Oberfläche Dia.HC beschichtet
- Delamination free drilling of CFRP
- Special geometry
- Drilling depth recommended $2 \times \varnothing$
- With Dia.HC coating

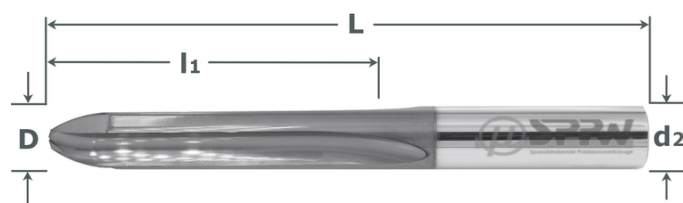

VHM	Dia HC
z:3	DIN 6535HA
OAL 100	GFK CFK

$\varnothing D$ H7	$\varnothing d2$ h6	L	l1	Art. No.	Stk/pce Euro	$\varnothing D$ H7	$\varnothing d2$ h6	L	l1	Art. No.	Stk/pce Euro
2	2	100	50	7311700200HC	36,90	6	6	100	50	7311700600HC	59,40
2,48	2,48	100	50	7311700248HC	36,90	6,35	6,35	100	50	7311700635HC	60,40
3	3	100	50	7311700300HC	38,50	7	7	100	50	7311700700HC	66,60
3,17	3,17	100	50	7311700317HC	43,20	7,92	7,92	100	50	7311700792HC	77,00
4	4	100	50	7311700400HC	45,00	8	8	100	50	7311700800HC	77,00
4,21	4,21	100	50	7311700421HC	50,00	8,63	8,63	100	50	7311700863HC	91,70
4,82	4,82	100	50	7311700482HC	53,60	9	9	100	50	7311700900HC	91,70
5,05	5,05	100	50	7311700505HC	55,20	10	10	100	50	7311701000HC	100,80
5,53	5,53	100	50	7311700553HC	55,20	12	12	100	50	7311701200HC	135,00

D