


731 270 01

Bohrreibahlen VHM+Dia.HC für Faserwerkstoffe 4 Schneiden Carbide Drill Reamers+Dia.HC for FRP 4 Flutes



- Delaminierungsfreies Bohren von CFK
- Spezielle Geometrie
- Empfohlene Einsatztiefe $3 \times \varnothing$
- Oberfläche Dia.HC beschichtet
- Delamination free drilling of CFRP
- Special geometry
- Drilling depth recommended $3 \times \varnothing$
- With Dia.HC coating

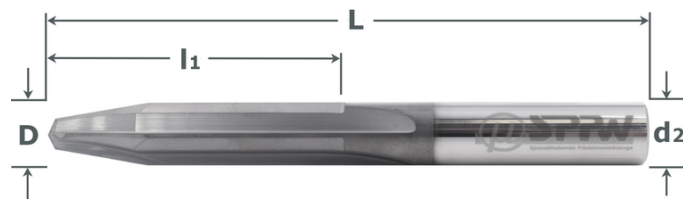

VHM	Dia HC
z:4	DIN 6535HA
OAL 100	GFK CFK

ØD h6	Ød2 h6	L	l1	Art. No.	Stk/pce Euro	ØD h6	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
2	2	100	50	7312700200HC	42,89	6	6	100	50	7312700600HC	69,19
2,48	2,48	100	50	7312700248HC	44,59	6,35	6,35	100	50	7312700635HC	70,19
3	3	100	50	7312700300HC	44,59	7	7	100	50	7312700700HC	89,79
3,17	3,17	100	50	7312700317HC	50,09	7,92	7,92	100	50	7312700792HC	89,79
4	4	100	50	7312700400HC	52,39	8	8	100	50	7312700800HC	98,99
4,21	4,21	100	50	7312700421HC	57,99	8,63	8,63	100	50	7312700863HC	106,99
4,82	4,82	100	50	7312700482HC	62,19	9	9	100	50	7312700900HC	117,79
5,05	5,05	100	50	7312700505HC	64,29	10	10	100	50	7312701000HC	117,89
5,53	5,53	100	50	7312700553HC	64,29	12	12	100	50	7312701200HC	160,99

