


752 555

Kugelfräser VHM+X.Cut 260° Radius für Hinterschnitte
Carbide Radius End Mills+X.Cut 260° Radius for Undercut Milling



- Zur 3D-Bearbeitung im Formenbau
- Umschließungswinkel 260°
- HSC-Bearbeitung mit Hinterschnitten
- Oberfläche X.Cut beschichtet
- 3D copy milling for toolmakers
- Especially HSC milling
- 260° radius for undercut milling
- With X.Cut coating
- Delivery time approx. 5 working days

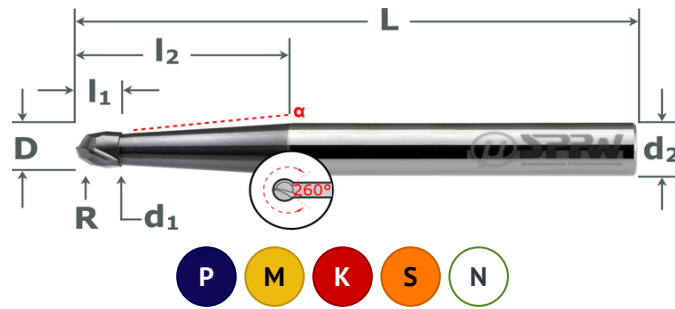

| | |
|-------------|--------|
| VHM | X Cut |
| N 30° | z:2 |
| DIN 6535HA | L lang |
| 260° Radius | |

| ØD h8 | Ød2 h6 | L | l1 | l2 | Ød1 | a | z | r Radius | Art. No. | Stk/pce Euro |
|----------|-----------|-----|------|----|-----|-------|---|-------------|------------|-----------------|
| 2 | 4 | 75 | 1,7 | 17 | 1 | 6° | 2 | 1 | 7525550200 | 37,10 |
| 3 | 6 | 100 | 2,6 | 17 | 1,7 | 8° | 2 | 1,5 | 7525550310 | 57,80 |
| 3 | 6 | 150 | 2,6 | 30 | 1,7 | 4°25' | 2 | 1,5 | 7525550315 | 71,00 |
| 4 | 6 | 100 | 3,5 | 17 | 2,4 | 7° | 2 | 2 | 7525550410 | 57,80 |
| 4 | 6 | 150 | 3,5 | 30 | 2,4 | 3°50' | 2 | 2 | 7525550415 | 71,00 |
| 6 | 6 | 100 | 5,2 | 30 | 4 | 2°10' | 2 | 3 | 7525550610 | 57,80 |
| 6 | 6 | 150 | 5,2 | 45 | 4 | 1°20' | 2 | 3 | 7525550615 | 73,40 |
| 8 | 8 | 100 | 7 | 35 | 5 | 3°10' | 2 | 4 | 7525550810 | 85,60 |
| 8 | 8 | 150 | 7 | 50 | 5 | 1°55' | 2 | 4 | 7525550815 | 109,00 |
| 10 | 10 | 100 | 8,7 | 40 | 6,1 | 3°40' | 2 | 5 | 7525551010 | 107,90 |
| 10 | 10 | 150 | 8,7 | 60 | 6,1 | 2°10' | 2 | 5 | 7525551015 | 146,80 |
| 12 | 12 | 100 | 10,5 | 50 | 7,5 | 3°10' | 2 | 6 | 7525551210 | 146,80 |
| 12 | 12 | 150 | 10,5 | 75 | 7,5 | 1°50' | 2 | 6 | 7525551215 | 189,00 |


— INFO —

— INFO —

Lollipop Radiusfräser mit 260° Umschließungswinkel | Lollipop Ball Nose Cutter with 260° Enclosure

- Speziell für Hinterschnitte im Formenbau
- Zum Entgratfräsen geeignet
- Micro im Kapitel H

- Designed for undercut milling in mold making
- Suitable for backward deburring
- Micro in chapter H

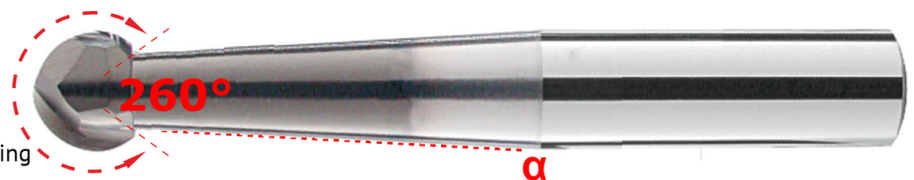

J