


761 541

Micro-Hochleistungs-Kühlkanalbohrer VHM 5xØ Carbide Micro High Performance Drills Internal Cooling 5xØ



- Breiter Anwendungsbereich
- 4-Flächen-Anschliff
- Innenkühlung, Mindestdruck 80 bar
- Verstärkter Schaft Ø3 h6
- Oberfläche blank

- Broad field of application
- 4 facet grinding
- Internal cooling, minimum 80 bar
- Reinforced shank Ø3 h6
- Bright finish

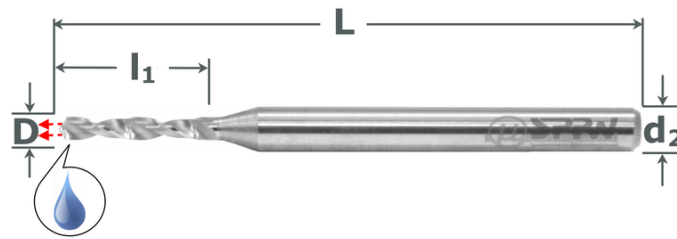

VHM	blank
mini N	130°
DIN 6535HA	IK cool

761541 - 5xØ

ØD h6	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
0,5	3	38	4	7615410050	301,99
0,7	3	38	5	7615410070	158,19
0,8	3	38	5	7615410080	129,49
1	3	38	6	7615410100	80,59
1,2	3	38	8	7615410120	80,59
1,5	3	38	12	7615410150	80,59

ØD h6	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
1,6-1,9	3	38	12	761541xxxx	80,59
2	3	46	18	7615410200	66,19
2,1-2,4	3	46	18	761541xxxx	66,19
2,5	3	46	18	7615410250	66,19
2,6-2,9	3	46	18	761541xxxx	66,19
3	3	46	18	7615410300	66,19

D