


**761 631**

## Micro-Hochleistungs-Kühlkanalbohrer VHM+X.Cut 8xØ Carbide High Performance Micro Drills+X.Cut Internal Cooling 8xØ



- Breiter Anwendungsbereich
- 4-Flächen-Anschliff
- Innenkühlung, Mindestdruck 80 bar
- Verstärkter Schaft Ø3 h6
- Oberfläche X.Cut beschichtet
- Broad field of application
- 4 facet grinding
- Internal cooling, minimum 80 bar
- Reinforced shank Ø3 h6
- With X.Cut coating

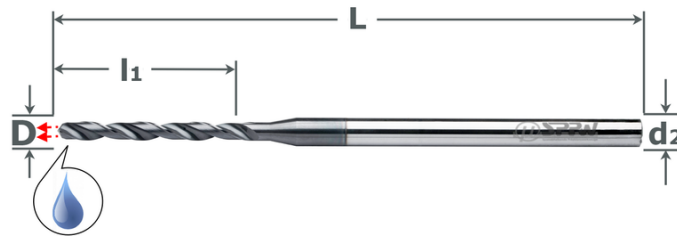

VHM	X Cut
mini N	140°
DIN 6535HA	8xØ
IK cool	

### 761631 - 8xØ

ØD m7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro	ØD m7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro	ØD m7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
1,0	3	55	11	7616310100	73,00	1,7	3	65	22	7616310170	78,60	2,4	3	74	28	7616310240	84,20
1,1	3	55	17	7616310110	73,00	1,8	3	65	22	7616310180	78,60	2,5	3	74	28	7616310250	84,20
1,2	3	55	17	7616310120	73,00	1,9	3	65	22	7616310190	78,60	2,6	3	81	32	7616310260	89,80
1,3	3	55	17	7616310130	73,00	2,0	3	65	22	7616310200	78,60	2,7	3	81	32	7616310270	89,80
1,4	3	55	17	7616310140	73,00	2,1	3	74	28	7616310210	84,20	2,8	3	81	32	7616310280	89,80
1,5	3	55	17	7616310150	73,00	2,2	3	74	28	7616310220	84,20	2,9	3	81	32	7616310290	89,80
1,6	3	65	22	7616310160	78,60	2,3	3	74	28	7616310230	84,20						

**D**