


761 741

Micro-Hochleistungs-Kühlkanalbohrer VHM 10xØ Carbide Micro High Performance Drills Internal Cooling 10xØ



- Breiter Anwendungsbereich
- 4-Flächen-Anschliff
- Innenkühlung, Mindestdruck 80 bar
- Verstärkter Schaft Ø3 h6
- Oberfläche blank

- Broad field of application
- 4 facet grinding
- Internal cooling, minimum 80 bar
- Reinforced shank Ø3 h6
- Bright finish

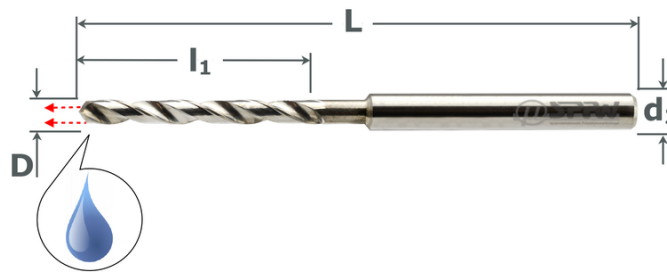

VHM	blank
micro N	130°
DIN 6535HA	IK cool



761741 - 8xØ

ØD h6	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
0,5	3	38	6	7617410050	350,89
0,7	3	38	8	7617410070	172,59
0,8	3	38	10	7617410080	158,19
1	3	38	12	7617410100	115,09
1,2	3	38	12	7617410120	115,09
1,5	3	38	16	7617410150	115,09
1,6	3	46	16	7617410160	115,09

ØD h6	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
1,7-1,8	3	46	18	761741xxxx	115,09
1,9	3	46	20	7617410190	115,09
2	3	46	20	7617410200	100,79
2,1-2,4	3	60	25	761741xxxx	100,79
2,5	3	60	25	7617410250	122,19
2,6-2,9	3	60	30	761741xxxx	122,19
3	3	60	30	7617410300	122,19