


123 600

NC-Anbohrer HSS-E05+X.Cut 120° HSS-E05 NC Spotting Drills+X.Cut 120°



- Formgenauer Präzisionsanschliff
- Optimiertes Eindringverhalten
- Glatter Zylinderschaft Toleranz h6
- Senkwinkel 120°
- Oberfläche X5.Cut beschichtet
- High precision point geometry
- Easy penetration and high accuracy
- Straight shank in tolerance h6
- Point angle 120°
- With X5.Cut coating

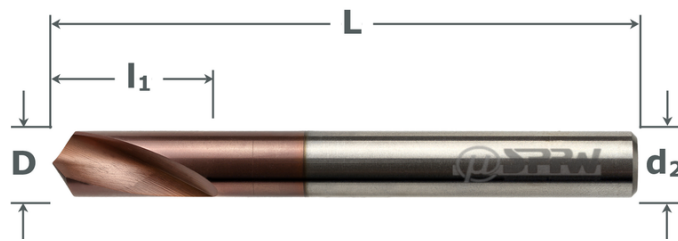

HSS E05	X Cut
ISO 10898	120°
DIN 1835A	DIN 1835B

B

ØD h7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
2	2	49	8	1236000200	12,60
3	3	50	10	1236000300	10,05
4	4	52	12	1236000400	8,30
5	5	60	15	1236000500	8,55
6	6	66	20	1236000600	9,40
8	8	79	25	1236000800	11,30
10	10	89	25	1236001000	14,80

ØD h7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
12	12	102	30	1236001200	20,80
14	14	115	35	1236001400	30,00
16	16	115	35	1236001600	31,80
18	18	130	40	1236001800	46,90
20	20	131	40	1236002000	45,70
25	25	138	45	1236002500	77,40