


**123 620**

## Kernloch-Stufenzentrierbohrer HSS-E05 Form D HSS-E05 Step Center Drills for Threaded Holes Form D



A

- Formbohrung nach DIN 332-2 D
- Kernloch, Fase und Zentrierung
- Ohne Fläche und Kühlnuten
- Oberfläche blank
- Profile drilling acc. DIN 332-2 D
- tap hole, chamfer and center
- Without flat and coolant grooves
- Bright finish

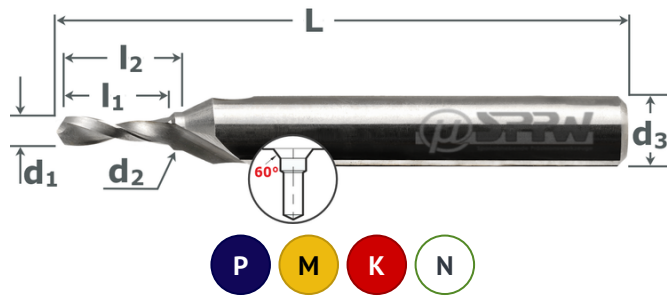

HSS E05	blank
DIN 332-2	Form D
60° 90°	ZYL

### 60° - Zylinderschaft | Cylindrical Shank

M	Ød1 -0,05	Ød2 ±0,05	Ød3 h7	L	l1	l2	Art. No.	Stk/pce Euro
3	2,5	3,2	6	55	8	9	1236200300	36,60
4	3,3	4,3	8	63	11	12,6	1236200400	29,50
5	4,2	5,3	10	67	13	15,1	1236200500	31,30
6	5	6,4	12,5	71	16	18,9	1236200600	36,60
8	6,8	8,4	14	88	19	23	1236200800	49,20
10	8,5	10,5	16	90	23	27,7	1236201000	53,70
12	10,2	13	20	105	28	34,5	1236201200	68,60