




- Anbohren und Zentrieren
- Sonderanschliff mit verstärkter Spitze
- Spitzenwinkel 118°, Senkwinkel 60°
- Doppelseitig: 1 DuoMag = 2 Anbohrer
- Oberfläche blank

- Spotting and centering
- Special geometry, reinforced point
- Point 118°, chamfering angle 60°
- Double: 1 DuoMag = 2 spotting drills
- Bright finish

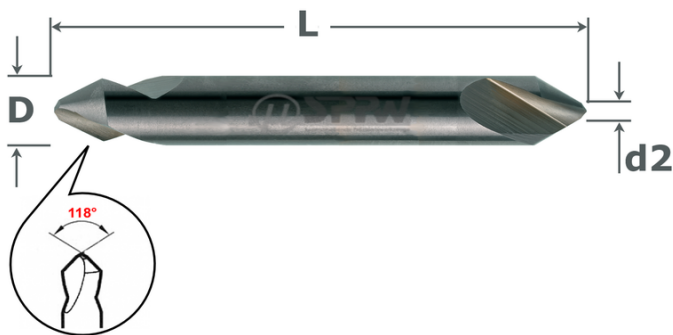

HSS E05	blank
60°	2 ENDS

B



ØD h7	Ød2 ±0,2	L ±1	a ±1°	Art. No.	Stk/pce Euro
3	0,5	40	60°	1246000300	7,69
4	1	45	60°	1246000400	8,39
6	2	55	60°	1246000600	9,09
8	2,5	65	60°	1246000800	10,59

ØD h7	Ød2 ±0,2	L ±1	a ±1°	Art. No.	Stk/pce Euro
10	3	75	60°	1246001000	13,59
12	3,5	85	60°	1246001200	18,09
16	4	90	60°	1246001600	33,09
20	5	100	60°	1246002000	48,19