


**124 917**

**NC-Anbohrer HSS-E05+X.Cut DuoMag Doppelseitig 90° L:100**  
**HSS-E05 NC Spotting Drills+X.Cut DuoMag Double 90° L:100**



- Anbohren und Zentrieren
- Sonderanschliff mit verstärkter Spitze
- Spitzwinkel 118°, Senkwinkel 90°
- Doppelseitig: 1 DuoMag = 2 Anbohrer
- Oberfläche X5.Cut beschichtet
- Spotting and centering
- Special geometry, reinforced point
- Point 118°, chamfering angle 90°
- Double: 1 DuoMag = 2 spotting drills
- With X5.Cut coating

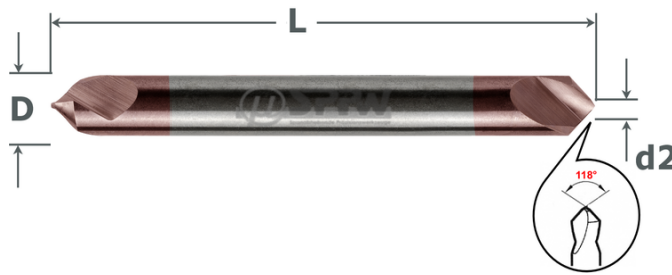

HSS E05	X Cut
90°	2 ENDS
OAL 100	



**124917 - OAL:100**

ØD h7	Ød2 ±0,2	L ±1	a ±1°	Art. No.	Stk/pce Euro	ØD h7	Ød2 ±0,2	L ±1	a ±1°	Art. No.	Stk/pce Euro
3	0,5	100	90°	1249170300	19,40	8	2,5	100	90°	1249170800	25,90
4	1	100	90°	1249170400	22,40	10	3	100	90°	1249171000	31,70
6	2	100	90°	1249170600	24,50	12	3,5	100	90°	1249171200	37,50

**B**