


124 927

NC-Anbohrer HSS-E05+X.Cut DuoMag Doppelseitig 90° L:150
HSS-E05 NC Spotting Drills+X.Cut DuoMag Double 90° L:150



- Anbohren und Zentrieren
- Sonderanschliff mit verstärkter Spitze
- Spitzenwinkel 118°, Senkwinkel 90°
- Doppelseitig: 1 DuoMag = 2 Anbohrer
- Oberfläche X5.Cut beschichtet
- Spotting and centering
- Special geometry, reinforced point
- Point 118°, chamfering angle 90°
- Double: 1 DuoMag = 2 spotting drills
- With X5.Cut coating

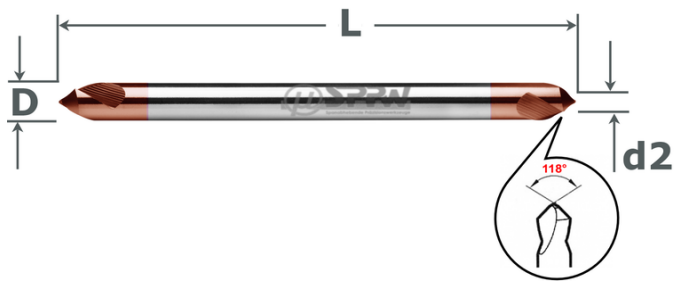

HSS E05	X Cut
90°	2 ENDS
OAL 150	

B



124927 - OAL:150

ØD	Ød2	L	a	Art. No.	Stk/pce	ØD	Ød2	L	a	Art. No.	Stk/pce
h7	±0,2	±1	±1°		Euro	h7	±0,2	±1	±1°		Euro
8	2,5	150	90°	1249270800	37,50	16	4	150	90°	1249271600	64,80
10	3	150	90°	1249271000	43,20	20	5	150	90°	1249272000	92,20
12	3,5	150	90°	1249271200	46,10						

— INFO —

— INFO —

