


155 206

Flachsenker HSS-E05+A.Cut 180°  
HSS-E05 Piloted Counter Bores+A.Cut 180°



- Flachsenker mit Führungszapfen
- Innensechskant-, Zylinderschraube
- Für Durchgangsbohrungen (F,M)
- Gewindekernlöcher (K)
- Senkwinkel 180°
- Oberfläche A.Cut Beschichtung
- Counter bores with fixed pilot
- For cheese, fillister screw caps
- For through holes (Fine, Medium)
- Tapping holes (K)
- Chamfering angle 180°
- With A.Cut coating

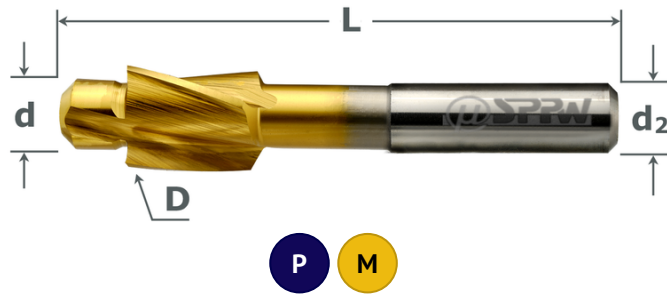

HSS E05	A Cut
DIN 373	180°
z:3	ZYL



ØM	ØD	Ød	Ød2	L	z	Typ	Art. No.	Stk/pce	ØM	ØD	Ød	Ød2	L	z	Typ	Art. No.	Stk/pce
	z9	e8	z9					Euro	z9	e8	z9						Euro
2	4,3	2,2	4,3	56	3	F	155206020F	21,10	5	10	5,5	10	80	3	M	155206050M	26,40
2	4,3	2,4	4,3	56	3	M	155206020M	21,10	6	11	6,4	11	80	3	F	155206060F	29,00
2,5	5	2,7	5	56	3	F	155206025F	21,10	6	11	6,6	11	80	3	M	155206060M	29,00
2,5	5	2,9	5	56	3	M	155206025M	21,10	8	15	8,4	12,5	100	3	F	155206080F	39,50
3	6	3,2	6	71	3	F	155206030F	23,70	8	15	9	12,5	100	3	M	155206080M	39,50
3	6	3,4	6	71	3	M	155206030M	23,70	10	18	10,5	12,5	100	3	F	155206100F	52,70
4	8	4,3	8	71	3	F	155206040F	23,70	10	18	11	12,5	100	3	M	155206100M	52,70
4	8	4,5	8	71	3	M	155206040M	23,70	12	20	13	12,5	100	3	F	155206120F	65,90
5	10	5,3	10	80	3	F	155206050F	26,40	12	20	14	12,5	100	3	M	155206120M	65,90

