




- Mit 60° Teilprofil für M/MF Gewinde
- Maximaler Freiheitsgrad
- Geringer Druck für hochfeste Stoffe
- CNC-Steuerung wird benötigt
- Oberfläche X.Cut beschichtet

- Partial profile for M/MF threads
- Maximum freedom for all 60° threads
- Low force for hardmaterials
- CNC control is required
- With X.Cut coating

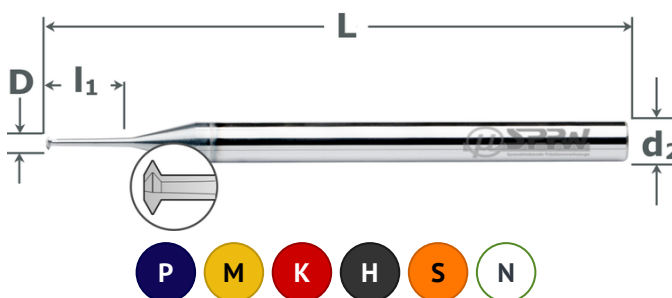

| | |
|-------|---------------|
| VHM | X Cut |
| z:3 | DIN 6535HA |
| Micro | M UN |

| M | ØD* | Ød2 h5 | L | l1 | Ød1* | C | z | Art. No. | Stk/pce Euro |
|-----|------|-----------|----|-----|------|-------|---|---------------|-----------------|
| 0,8 | 0,57 | 3 | 39 | 2,4 | 0,31 | 0,01 | 3 | SM03057C24M08 | 62,70 |
| 0,9 | 0,64 | 3 | 39 | 2,7 | 0,35 | 0,01 | 3 | SM03064C27M09 | 60,90 |
| 1 | 0,71 | 3 | 39 | 3 | 0,39 | 0,015 | 3 | SM03071C30M10 | 58,10 |
| 1,2 | 0,91 | 3 | 39 | 3,6 | 0,57 | 0,015 | 3 | SM03091C36M12 | 56,30 |
| 1,4 | 1,06 | 3 | 39 | 4,2 | 0,66 | 0,02 | 3 | SM03106C42M14 | 54,50 |
| 1,6 | 1,2 | 3 | 39 | 4,8 | 0,75 | 0,02 | 3 | SM03120C48M16 | 53,50 |
| 2 | 1,5 | 3 | 39 | 6 | 0,99 | 0,02 | 3 | SM03150C60M02 | 56,30 |
| 2,5 | 1,9 | 3 | 39 | 7 | 1,33 | 0,025 | 3 | SM03190C70M25 | 57,20 |
| 3 | 2,3 | 6 | 66 | 9 | 1,62 | 0,03 | 3 | SM06230C90M03 | 61,80 |
| 4 | 3,1 | 6 | 66 | 12 | 2,19 | 0,04 | 3 | SM06310C12M04 | 72,90 |
| 5 | 4 | 6 | 66 | 15 | 2,98 | 0,05 | 3 | SM06400C15M05 | 74,80 |
| 6 | 4,8 | 6 | 75 | 18 | 3,55 | 0,07 | 3 | SM06480C18M06 | 79,19 |
| 8 | 6,5 | 8 | 80 | 22 | 4,96 | 0,08 | 3 | SM08650C22M08 | 99,60 |
| 10 | 7,9 | 8 | 80 | 26 | 6,07 | 0,09 | 3 | SM08790C26M10 | 108,90 |