




- Konische Innen-,Außengewinde
- Gewinden und Entgraten in einem Zug
- Oberfläche X6.Cut beschichtet
- Internal, external threads - NPTF
- Threading, deburring in 1 operation
- With X6.Cut coating



| | |
|---------------|----------------|
| VHM | X Cut |
| INT EXT | z: 3-4 |
| DIN 6535HA | Thread Burr |
| NPTF | |

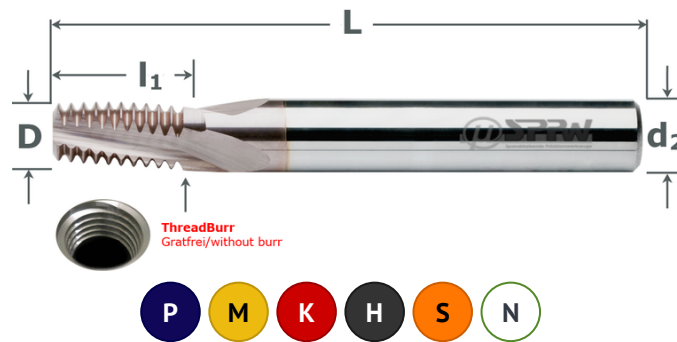

| Stg. TPI | ØD | Ød2 | L | l1 | z | NPTF | Art. No. | Stk/pce Euro | Stg. TPI | ØD | Ød2 | L | l1 | z | NPTF | Art. No. | Stk/pce Euro |
|-------------|----|-----|----|-------|---|----------|-----------------|-----------------|-------------|----|-----|-----|-------|---|-------|------------------|-----------------|
| 27 | 6 | 6 | 63 | 10,82 | 3 | 1/16-1/8 | XB0606C1027NPTF | 147,00 | 11,5 | 16 | 16 | 89 | 29,82 | 4 | 1'-2' | XB1616D29115NPTF | 399,20 |
| 18 | 8 | 8 | 63 | 16,23 | 3 | 1/4-3/8 | XB0808C1618NPTF | 185,90 | 8 | 20 | 20 | 100 | 42,86 | 4 | 2'1/2 | XB2020D428NPTF | 501,70 |
| 14 | 12 | 12 | 83 | 22,68 | 4 | 1/2-3/4 | XB1212D2214NPTF | 277,70 | | | | | | | | | |

