


613 660

Hochleistungs-Maschinenreibahlen VHM DIN 212 mit IK
Carbide Through Hole Reamers DIN 212 Internal Cooling



- Anschnitt 45°, Durchgangsbohrungen
- Toleranz H7
- Linksspirale, rechtsschneidend
- Oberfläche blank
- Lieferzeit ca. 5 Arbeitstage
- Chamfer 45°, reaming through holes
- Tolerance H7
- LH-helix, right hand cutting
- Bright finish
- Delivery time 5 working days

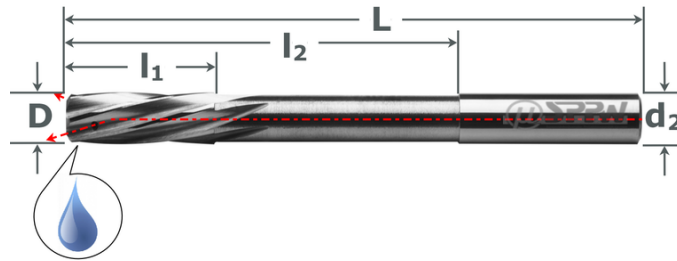

VHM	blank
DIN 212	Form B
H7	z:6
DIN 6535HA	IK cool

ØD H7	Ød2 h6	L	l1	l2	z	Art. No.	Stk/pce Euro	ØD H7	Ød2 h6	L	l1	l2	z	Art. No.	Stk/pce Euro
3,9	4	75	19	51	6	6136600390	120,19	7,6-7,9	8	117	33	86	6	613660xxxx	173,29
4	4	75	19	51	6	6136600400	99,99	8	8	117	33	86	6	6136600800	144,59
4,1-4,7	4	75	19	51	6	613660xxxx	120,19	8,1-8,5	8	117	33	86	6	613660xxxx	173,29
4,8-4,9	5	86	23	60	6	613660xxxx	129,69	8,6-8,9	8	117	33	86	6	613660xxxx	173,29
5	5	86	23	60	6	6136600500	108,49	9	8	117	33	86	6	6136600900	207,19
5,1-5,3	5	86	23	60	6	613660xxxx	129,69	9,1-9,5	8	117	33	86	6	613660xxxx	207,19
5,4-5,8	5	86	23	60	6	613660xxxx	142,39	9,6-9,9	10	133	38	99	6	613660xxxx	222,09
5,9	6	101	28	73	6	613660xxxx	144,59	10	10	133	38	99	6	6136601000	184,99
6	6	101	28	73	6	6136600600	120,19	10,1-10,9	10	133	38	99	6	613660xxxx	222,09
6,1-6,7	6	101	28	73	6	613660xxxx	144,59	11	10	133	38	99	6	6136601100	222,09
6,8-6,9	6	101	28	73	6	613660xxxx	167,99	11,1-11,3	10	133	38	99	6	613660xxxx	222,09
7	6	101	28	73	6	6136600700	167,99	11,4-11,9	12	151	44	106	6	613660xxxx	291,29
7,1-7,5	6	101	28	73	6	613660xxxx	167,99	12	12	151	44	106	6	6136601200	242,29

E