


**623 497****NC-Anbohrer VHM+X.Cut 90°  
Carbide NC Spotting Drills+X.Cut 90°**

- Formgenauer Präzisionsanschliff
- Optimiertes Eindringverhalten
- Hohe Rundlaufgenauigkeit
- Glatter Zylinderschaft mit Toleranz h6
- Senkwinkel 90°
- Oberfläche X.Cut beschichtet

- High precision point geometry
- Easy penetration and high accuracy
- High concentricity
- Straight shank in tolerance h6
- Point angle 90°
- With X.Cut coating

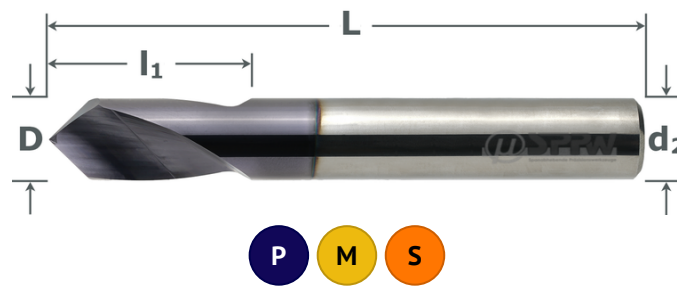

VHM	X Cut
ISO 10898	90°
DIN 6535HA	DIN 6535HB

**B**

ØD h6	Ød2 h6	L	l1	Art. No.	Stk/pce Euro	ØD h6	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
2	2	40	8	6234970200	12,50	8	8	60	23	6234970800	27,50
3	3	50	10	6234970300	13,30	10	10	70	24	6234971000	37,70
4	4	50	12	6234970400	14,70	12	12	70	24	6234971200	49,50
5	5	50	15	6234970500	17,70	16	16	80	26	6234971600	79,80
6	6	50	18	6234970600	20,70	20	20	100	35	6234972000	142,70