


623 511

NC-Anbohrer VHM 142° Spannfläche Carbide NC Spotting Drills 142° Flat



- Formgenauer Präzisionsanschliff
- Optimiertes Eindringverhalten
- Hohe Rundlaufgenauigkeit
- Ab Ø6 Schaft DIN 6535 HB
- 142° Spitze für HPC-Bohrer
- Oberfläche blank

- High precision point geometry
- Easy penetration and high accuracy
- High concentricity
- Ø6 and up shank DIN 6535 HB
- 142° point - spotting for HPC drills
- Bright finish

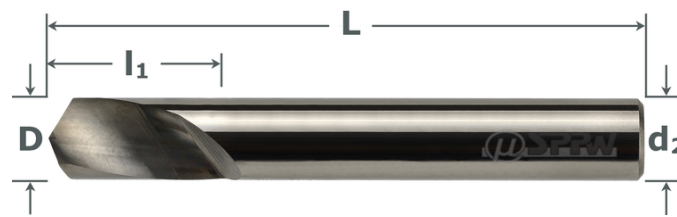

VHM	blank
ISO 10898	142°
DIN 6535HA	DIN 6535HB

B

ØD h6	Ød2 h6	L	l1	Schaft	Art. No.	Stk/pce Euro	ØD h6	Ød2 h6	L	l1	Schaft	Art. No.	Stk/pce Euro
3	3	50	10	HA	6235110300	11,40	10	10	70	24	HB	6235111000	31,90
4	4	50	12	HA	6235110400	12,60	12	12	70	24	HB	6235111200	42,50
5	5	50	15	HA	6235110500	13,70	16	16	80	26	HB	6235111600	68,00
6	6	50	18	HB	6235110600	16,90	20	20	100	35	HB	6235112000	130,10
8	8	60	23	HB	6235110800	23,20							