


**623 512**

## NC-Anbohrer VHM+X.Cut 142° Spannfläche Carbide NC Spotting Drills+X.Cut 142° Flat



- Formgenauer Präzisionsanschiff
- Optimiertes Eindringverhalten
- Hohe Rundlaufgenauigkeit
- Ab Ø6 Schaft DIN 6535 HB
- 142° Spitze für HPC-Bohrer
- Oberfläche X.Cut beschichtet
- High precision point geometry
- Easy penetration and high accuracy
- High concentricity
- Ø6 and up shank DIN 6535 HB
- 142° point for HPC drills
- Bright finish or with X.Cut coating

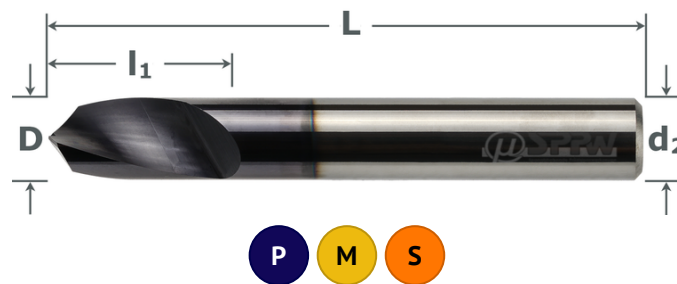

VHM	X Cut
ISO 10898	142°
DIN 6535HA	DIN 6535HB

**B**

ØD h6	Ød2 h6	L	l1	Schaft	Art. No.	Stk/pce Euro	ØD h6	Ød2 h6	L	l1	Schaft	Art. No.	Stk/pce Euro
3	3	50	10	HA	6235120300	13,30	10	10	70	24	HB	6235121000	39,70
4	4	50	12	HA	6235120400	14,70	12	12	70	24	HB	6235121200	51,50
5	5	50	15	HA	6235120500	17,70	16	16	80	26	HB	6235121600	80,40
6	6	50	18	HB	6235120600	22,10	20	20	100	35	HB	6235122000	145,20
8	8	60	23	HB	6235120800	29,30							