




- Für die allgemeine Anwendung
- Kurze, stabile Ausführung
- Verstärkter Zylinderschaft Form HA
- Zentrumschnitt 1 Schneide über Mitte
- Oberfläche X.Cut beschichtet
- For all applications
- Short series with high rigidity
- Reinforced cylindrical shank form HA
- Center cutting
- With X.Cut coating

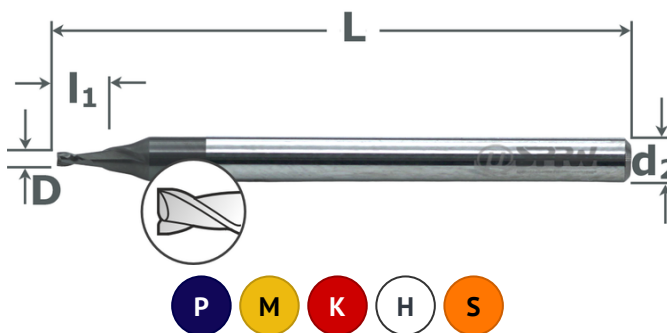

VHM	X Cut
micro N	z:2
DIN 6535HA	sharp

678500 - 2-3xØ

ØD h7	Ød2 h5	L	l1	z	Art. No.	Stk/pce Euro
0,1	3	39	0,2	2	6785000010	66,00
0,12	3	39	0,24	2	6785000012	67,50
0,15	3	39	0,3	2	6785000015	57,20
0,2	3	39	0,5	2	6785000020	46,60
0,25	3	39	0,5	2	6785000025	46,60
0,3	3	39	0,8	2	6785000030	26,80
0,35	3	39	0,8	2	6785000035	26,80
0,4	3	39	1	2	6785000040	22,20
0,45	3	39	1	2	6785000045	31,00
0,5	3	39	1,5	2	6785000050	19,80
0,55	3	39	1,5	2	6785000055	24,90
0,6	3	39	1,5	2	6785000060	19,80
0,65	3	39	1,5	2	6785000065	24,90
0,7	3	39	2	2	6785000070	19,80
0,75	3	39	2	2	6785000075	24,90
0,8	3	39	2	2	6785000080	19,80
0,85	3	39	2	2	6785000085	24,90
0,9	3	39	2,5	2	6785000090	19,80
0,95	3	39	2,5	2	6785000095	24,90
1	3	39	3	2	6785000100	19,80
1,05	3	39	3	2	6785000105	24,90
1,1	3	39	3	2	6785000110	19,40
1,15	3	39	3	2	6785000115	24,90
1,2	3	39	4	2	6785000120	19,80
1,25	3	39	4	2	6785000125	24,90
1,3	3	39	4	2	6785000130	21,30
1,4	3	39	4	2	6785000140	21,30
1,45	3	39	4	2	6785000145	22,30
1,5	3	39	4	2	6785000150	21,30
1,55	3	39	5	2	6785000155	23,60
1,6-1,7	3	39	5	2	678500xxxx	22,20
1,75	3	39	5	2	6785000175	23,60

ØD h7	Ød2 h5	L	l1	z	Art. No.	Stk/pce Euro
1,8-1,9	3	39	5	2	678500xxxx	22,20
2	3	39	5	2	6785000200	21,30
2,05	3	39	6	2	6785000205	27,10
2,1-2,2	3	39	6	2	678500xxxx	23,10
2,25	3	39	6	2	6785000225	27,10
2,3-2,4	3	39	6	2	678500xxxx	23,10
2,5	3	39	7	2	6785000250	23,10
2,6	3	39	7	2	6785000260	26,80
2,6-2,9	3	39	7	2	678500xxxx	26,80
3	4	44	10	2	6785000300	26,50
3,1-3,9	4	44	10	2	678500xxxx	30,40
4	5	52	12	2	6785000400	30,40
4,1-4,9	5	52	12	2	678500xxxx	37,90
5	6	52	14	2	6785000500	37,90
5,1-5,9	6	52	14	2	678500xxxx	43,60
6	6	52	16	2	6785000600	45,60
6,1-6,9	8	63	16	2	678500xxxx	64,50
7	8	63	18	2	6785000700	64,50
7,1-7,9	8	63	18	2	678500xxxx	64,50
8	8	63	20	2	6785000800	58,70
8,1-8,9	10	72	22	2	678500xxxx	85,60
9	10	72	22	2	6785000900	85,60
9,1-9,9	10	72	22	2	678500xxxx	85,60
10	10	72	26	2	6785001000	79,80
10,1-10,9	12	83	26	2	678500xxxx	122,60
11	12	83	28	2	6785001100	122,60
11,1-11,9	12	83	28	2	678500xxxx	122,60
12	12	83	30	2	6785001200	115,20
12,1-12,9	14	83	30	2	678500xxxx	180,60
13	14	83	32	2	6785001300	180,60
13,1-13,9	14	83	32	2	678500xxxx	180,60
14	14	83	35	2	6785001400	180,60

