


751 753

Hochleistungs-Torusfräser VHM Innenkühlung

Carbide High Performance Torical End Mills Internal Cooling



- TDC, in langspanenden Werkstoffen
- Kühlmittelzufuhr in den Spannuten
- Spanbrecher Typ WF
- Oberfläche poliert
- Lieferzeit 3 - 5 Arbeitstage
- Trochoidal, in long chipping material
- Coolant through flutes
- Chip breakers type WF
- Polished finish
- Delivery time 3 - working days

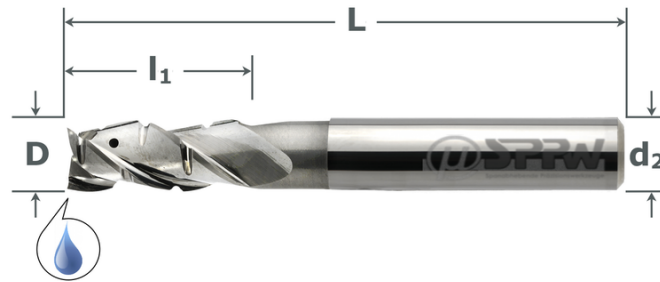

VHM	poliert
HPC-W 40°	z:3
DIN 6535HA	IK cool



ØD h10	Ød2 h6	L	l1	l2	z	r Radius	Ød3	Art. No.	Stk/pce Euro	ØD h10	Ød2 h6	L	l1	l2	z	r Radius	Ød3	Art. No.	Stk/pce Euro
10	10	72	22	30	3	0,2	9,5	7517531002	120,80	16	16	100	40	55	3	2,5	15,5	7517531625	217,70
10	10	72	22	30	3	2,5	9,5	7517531025	120,80	16	16	100	40	55	3	4	15,5	7517531640	217,70
12	12	83	26	38	3	0,3	11,5	7517531203	150,50	20	20	104	40	55	3	0,5	19,5	7517532005	302,10
12	12	83	26	38	3	2,5	11,5	7517531225	150,50	20	20	104	40	55	3	4	19,5	7517532040	302,10
16	16	100	40	55	3	0,4	15,5	7517531604	217,70										