




- Breiter Anwendungsbereich
- 4-Flächen-Anschliff
- Innenkühlung, Mindestdruck 80 bar
- Verstärkter Schaft Ø3 h6
- Oberfläche X.Cut beschichtet
- Broad field of application
- 4 facet grinding
- Internal cooling, minimum 80 bar
- Reinforced shank Ø3 h6
- With X.Cut coating



VHM	X Cut
mini N	140°
DIN 6535HA	5xØ
IK cool	

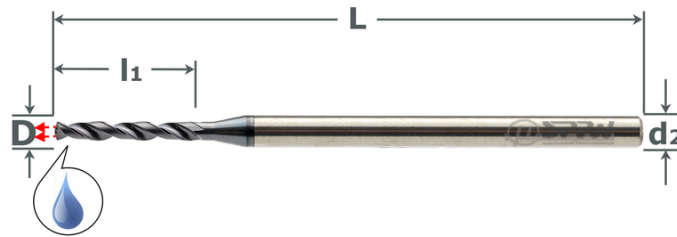

761531 - 5xØ

ØD m7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro	ØD m7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro	ØD m7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
1,0	3	55	8	7615310100	65,10	1,7	3	65	16	7615310170	71,90	2,4	3	74	20	7615310240	76,40
1,1	3	55	12	7615310110	65,10	1,8	3	65	16	7615310180	71,90	2,5	3	74	20	7615310250	76,40
1,2	3	55	12	7615310120	65,10	1,9	3	65	16	7615310190	71,90	2,6	3	81	23	7615310260	83,10
1,3	3	55	12	7615310130	65,10	2,0	3	65	16	7615310200	71,90	2,7	3	81	23	7615310270	83,10
1,4	3	55	12	7615310140	65,10	2,1	3	74	20	7615310210	76,40	2,8	3	81	23	7615310280	83,10
1,5	3	55	12	7615310150	65,10	2,2	3	74	20	7615310220	76,40	2,9	3	81	23	7615310290	83,10
1,6	3	65	16	7615310160	71,90	2,3	3	74	20	7615310230	76,40						