


123 630

Kernloch-Stufenzentrierbohrer HSS-E05 Form DR HSS-E05 Step Center Drills for Threaded Holes Form DR



A

- Formbohrung nach DIN 332-2 DR
- Zentrierung DIN 332-2 DR (Radius)
- Kernloch, Fase und Zentrierung
- Ohne Fläche und Kühlnuten
- Oberfläche blank
- Profile drilling acc. DIN 332-2 DR
- For radial centers
- tap hole, chamfer and center
- Without flat and coolant grooves
- Bright finish

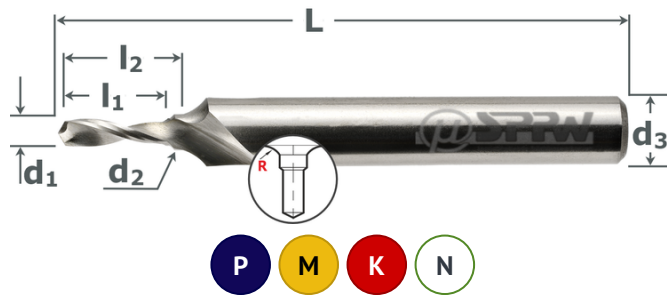

HSS E05	blank
DIN 332-2	Form DR
Radius 90°	ZYL

Radius - Zylinderschaft | Cylindrical Shank

M	Ød1 -0,05	Ød2 ±0,05	Ød3 h7	L	l1	l2	R Radius	Art. No.	Stk/pce Euro
4	3,3	4,3	8	63	11	12,6	4	1236300400	34,00
5	4,2	5,3	10	67	13	15,1	6	1236300500	36,20
6	5	6,4	12,5	71	16	18,9	8	1236300600	42,10
8	6,8	8,4	14	88	19	23	10	1236300800	53,60
10	8,5	10,5	16	90	23	27,7	14	1236301000	61,70
12	10,2	13	20	105	28	34,5	16	1236301200	77,70