



756 350

HSC-Torusfräser VHM+X.Cut

Carbide Torical HSC End Mills+X.Cut Short Series



- HSC-Kopierbearbeitung, Torus
- Formenbaustähle und gehärtete Stähle
- Kurze Ausführung mit Eckenradius
- Glatter Schaft DIN 6535 HA
- Oberfläche X.Cut beschichtet
- HSC copy milling, torical
- Toolmaking steels, hardened steels
- Short series with corner radius
- Straight shank DIN 6535 HA
- With X.Cut coating

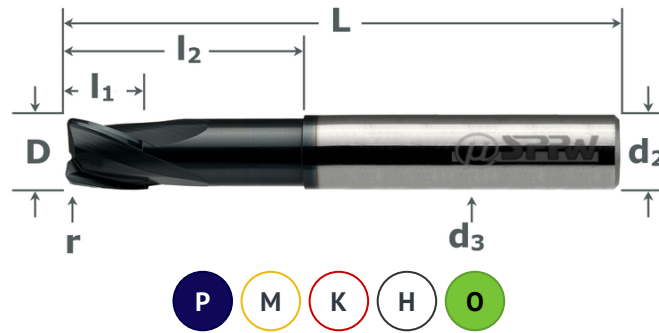

ØD h10	Ød2 h6	L	l1	l2	z	r Radius	Ød3	Art. No.	Stk/pce Euro	ØD h10	Ød2 h6	L	l1	l2	z	r Radius	Ød3	Art. No.	Stk/pce Euro
2,5	3	38	3	10	3	0,2	2,2	7563500202	50,89	8	8	63	8	27	3	0,5	7,4	7563500805	69,19
2,5	3	38	3	10	3	0,5	2,2	7563500205	50,89	8	8	63	8	27	3	1	7,4	7563500810	69,19
3	3	38	3	10	3	0,2	2,7	7563500302	43,19	8	8	63	8	27	3	1,5	7,4	7563500815	69,19
3	3	38	3	10	3	0,5	2,7	7563500305	43,19	8	8	63	8	27	3	2	7,4	7563500820	69,19
4	4	50	4	22	3	0,5	3,6	7563500405	45,39	10	10	72	10	32	3	1	9,2	7563501010	96,19
4	4	50	4	22	3	1	3,6	7563500410	45,39	10	10	72	10	32	3	1,5	9,2	7563501015	96,19
5	5	50	5	22	3	0,5	4,6	7563500505	51,39	10	10	72	10	32	3	2	9,2	7563501020	96,19
5	5	50	5	22	3	1	4,6	7563500510	51,39	10	10	72	10	32	3	2,5	9,2	7563501025	96,19
6	6	57	6	21	3	0,5	5,5	7563500605	51,59	12	12	83	12	38	4	1,5	11	7563501215	116,69
6	6	57	6	21	3	1	5,5	7563500610	51,59	12	12	83	12	38	4	2	11	7563501220	116,69
6	6	57	6	21	3	1,5	5,5	7563500615	51,59	12	12	83	12	38	4	2,5	11	7563501225	116,69
6	6	57	6	21	3	2	5,5	7563500620	51,59										

J